

# Polycom® VSX™ 6000

## Technical Specifications



### Video Standards & Protocols

- H.261
- H.263++
- H.264
- People+Content / H.239
- H.263 and H.264 Video Error Concealment

### People Video Resolution

- NTSC 30fps at 56Kbps-768Kbps
- PAL 24fps at 56Kbps-768Kbps
- Receives Polycom Pro-Motion™ 60/50 fields per second (full screen video for NTSC/PAL applications)
- 4SIF (704 x 480), 4CIF (704 x 576)
- SIF (352 x 240), CIF (352 x 288)
- QSIF (176 x 120), QCIF (176 x 144)
- Choice of 4:3 or 16:9 display aspect ratios
- Display People on VGA 2<sup>nd</sup> monitor

### Content Video Resolution

- XGA (1024 x 768), SVGA (800 x 600), VGA (640 x 480) for single monitor VGA or when using VGA as 2<sup>nd</sup> monitor

### Audio Standards & Protocols

- Polycom StereoSurround™
- 14kHz bandwidth with Polycom Siren 14, G.722.1 Annex C
- 7 kHz bandwidth with G.722, G.722.1
- 3.4 kHz bandwidth with G.711, G.728, G.729A
- Automatic Gain Control
- Automatic Noise Suppression
- Instant Adaptation Echo Cancellation
- Audio Error Concealment

### Other ITU-Supported Standards

- H.221 communications
- H.224/H.281 far-end camera control
- H.323 Annex Q far-end camera control
- H.225, H.245, H.241, H.331
- H.231 in multipoint calls
- H.243 chair control
- H.460.18/19 NAT/firewall traversal
- BONDING, Mode 1

### Network

- H.323 up to 768Kbps
- H.320 up to 512Kbps (with optional QBRI)
- SIP up to 768Kbps
- SCCP up to 768Kbps
- iPriority for QoS

### User Interface

- COD (PathNavigator Conference on Demand)
- Directory Services
- System Management
  - Web based
  - SNMP
  - GMS
- CDR
- API support
- Auto SPID detection and line number configuration
- International languages (15)

### Security

- Secure web [HTTPS]
- Secure TLS in Web, Telnet, FTP
- Security mode
- Secure password authentication
- Embedded AES FIPS 197, H.235V3 and H.233/234

### Electrical

- Auto sensing power supply
- Operating voltage/power 100-240 VAC, 50-60 Hz, 60 Watts
- Max 74 VA @ 115v60Hz, 87 VA @ 220v50Hz
- Max Heat Dissipation; 205 BTU/hour

### Environmental Specification

- Operating Temperature: 0-40°C
- Operating Humidity: 15-80%
- Non-Operating Temperature: -40-70° C
- Non-Operating Humidity (Non-condensing): 10-90%
- Maximum altitude is 10,000 feet

### Physical Characteristics



- Video Base Unit (W/H/D): 11.82" / 5.83" / 9.63"; 300.3 mm / 148 mm / 244.5 mm
- Video Base Unit Weight: 6.0 lbs; 2.8 kg

### Warranty

- One-year return to factory parts and labor
- 90-day software warranty

### Options

- QBRI module for ISDN capability up to 512Kbps
- Visual Concert VSX, PC/MAC compatible
  - Video input to codec, HD-15 connector
  - Audio input to codec, 3.5mm connector
  - Video output from codec, conference or local content, HD-15 connector
  - LAN hub, 1 input from LAN, 3 PC connections
- Cable-free content sharing with People+Content IP
- SoundStation VTX 1000

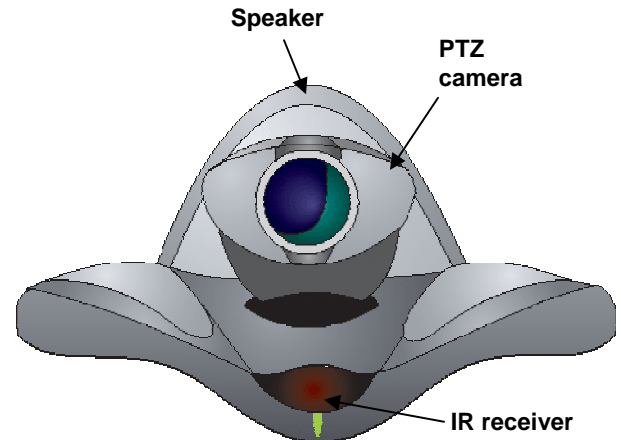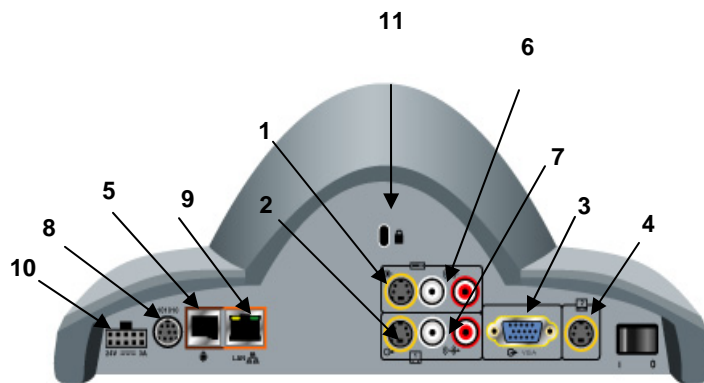

- |  |   |  |
|--|---|--|
| <ol style="list-style-type: none"> <li>1. Video input 1 for VCR/DVD (people or content)</li> <li>2. Video output 1 for main monitor</li> <li>3. Video output 2 for VGA/XGA main monitor, optional VGA/XGA 2<sup>nd</sup> monitor,</li> </ol> | <ol style="list-style-type: none"> <li>4. Video output 3 for 2<sup>nd</sup> monitor, option</li> <li>5. Audio input 1 (main): supports one device for stereo audio – see admin manual for device options and correct ordering of devices.</li> <li>6. Audio input 2 for stereo VCR/DVD</li> </ol> | <ol style="list-style-type: none"> <li>7. Audio output 1 for stereo line level</li> <li>8. RS-232 for control, pass thru, vertical solutions</li> <li>9. LAN NIC, 10/100 auto sensing</li> <li>10. Power</li> <li>11. Kensington™ lock connection</li> </ol> |
|--|---|--|